



SERRAX TECHNOLOGIES

ISO 9001 : 2015 Certified Company



Suitable For RTD's Thermocouple Indicators


Manufactured by : Serrax Technology

Environmental Monitoring Instruments

Front View



Top View

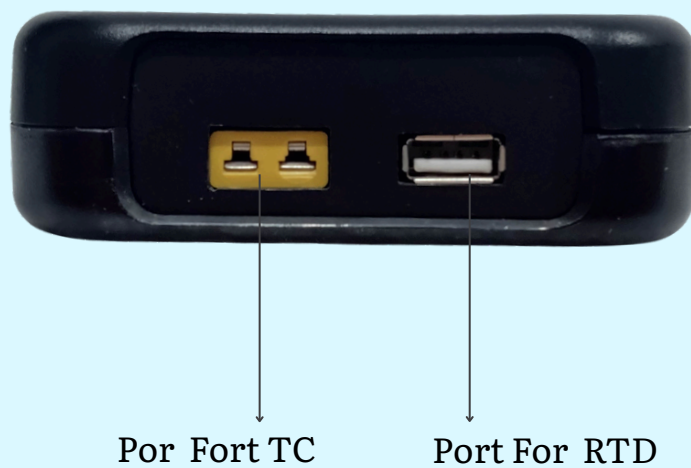

Bottom View



SPECIFICATIONS

Input channels	2
Battery Life	20 hr + in single charge
Range for RTD	Suitable for (-10 to 600) °C
Range for TC	Suitable for (-10 to 600) °C
Resolution	0.001°C for RTD (Pt100) /0.001°C For TC (K/E/J/T/N T/C)
Sensor Input	RTDs and thermocouples
Display Units	Display Units(Ohm, °C, °F & K) for RTD (mV, °C, °F & K) for thermocouples
Operating temperature	0°C to 50°C (Best accuracy 15°C to 30°C) <85% RH
Power requirements	220 VAC
Dimensions	205 mm x 97mm x 30 mm
Measurement Accuracy	± 0.01% of FS

Features:

- Fast Response and Laboratory Accuracy, Calibration Available.
- User-friendly front panel is easy to setup and operate
- Battery: Lithium ion.
- Applicable for multiple mathematical statistical measurements.
- Low power consumption.
- Used for laboratory and Industries which require precise temperature measurements.

we are

NABL Accredited Calibration Laboratory
ISO| IEC-17025 Certified

Manufacturer

ISO 9001 Certified

www.serrax.in

- Mechanical
- Thermal
- Fluid Flow
- Electrotechnical

Our Customers







GET IN TOUCH

 +91 8851 906 679

 info@serrax.in

 www.serrax.in

 A84, 2nd Floor, DDA SHED
Okhla Phase 2, New Delhi – 110020